


CLINCHING FASTENERS CO., LTD.

BROACHING STANDOFFS 用於 PCB 之圓型螺母

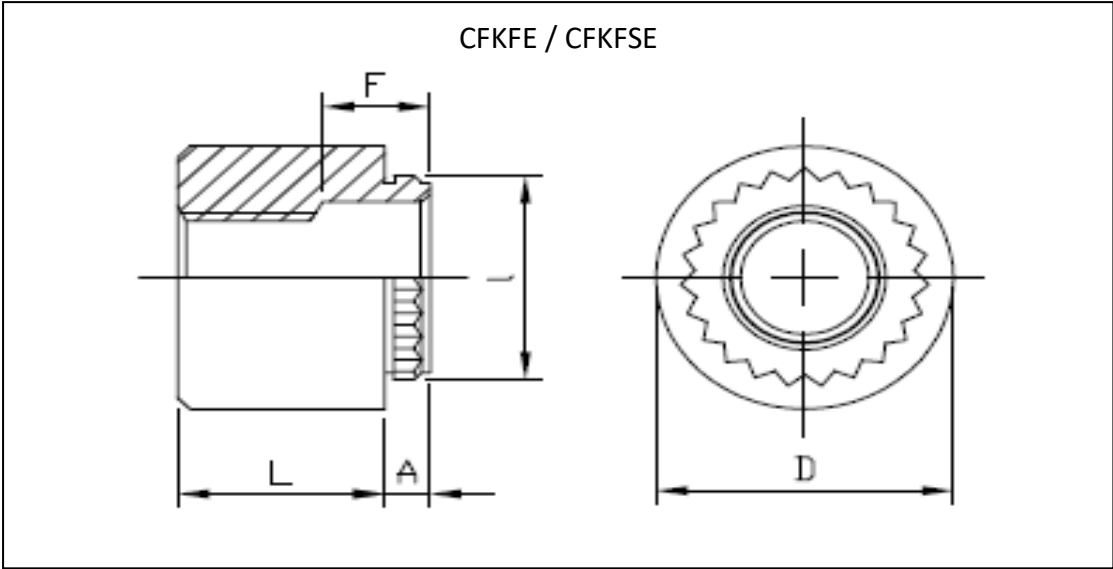

Material 材質: Steel 鋼 (CFKFE) / Stainless Steel 不銹鋼 (CFKFSE)

Finish 表面: Bright Tin plating 亮錫 (CFKFE) / Plain 原色 (CFKFSE)

CFKFE / CFKFSE

Dimensions: ISO metric /mm

Part Code 產品編號	Thread or Thru-Hole Sizes 螺紋尺寸及內孔徑	D ±0.13	A Shank Max.	l ±0.08	Min. Sheet Thickness 最小板厚	Hole Size in sheet +0.08	Min. Dist Hole C/L to Edge	L 長度 ±0.13							
CFKFE-M3 CFKFSE-M3	M3x0.5	5.56	1.53	4.68	1.53	4.22	4.4	3	4	6	8	10	12	14	16
CFKFE-36 CFKFSE-36	3.6	7.14	1.53	5.87	1.53	5.41	5.5	3	4	6	8	10	12	14	16
CFKFE-42 CFKFSE-42	4.2	8.74	1.53	6.86	1.53	6.4	7.1	3	4	6	8	10	12	14	16
Min. Thread L “F” 無牙深度								Full				9.5±0.4			

When used in plated thru-hole application a tolerance of +0.13mm/-0.03mm should be used. The performance values maybe reduced and knurl may damage plating.

PERFORMANCE DATE 性能數據表

TYPE 產品種類	Thread Size 螺紋尺寸	Sheet Material 板材料	Installation (KN) 安裝力	Push-out (N) 推力	Torque-out (N*m) 扭力
CFKFE CFKFSE	M3	1.5mm FR-4 Panel	2.2	290	1.7