
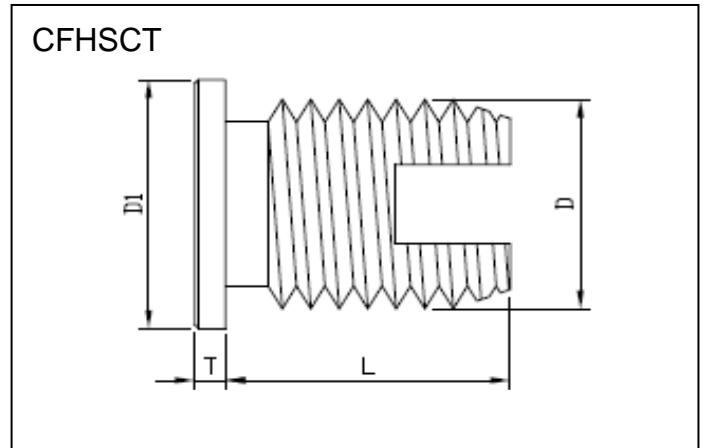


# CLINCHING FASTENERS CO., LTD.

## THREAD INSERT

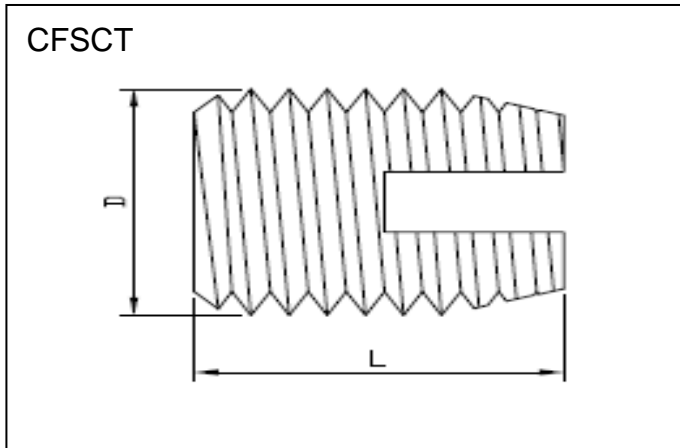

Material 材質 : Brass 銅 / Steel 鋼 / Stainless Steel 不鏽鋼

Finish 表面: Plain 原色 / Cr3+Zinc 三價鋅 / Plain 原色

### CFSCS

Dimensions : ISO metric /mm

Part Code	Thread Size	L	D Max	Rec. Hole Size Thermoplastics -0.00/+0.10	Min. Wall Thickness
CFSCS-M3	M3	6	5.0	4.5~4.6	Evaluate by Preproduction Test
CFSCS-M3.5	M3.5	8	6.0	5.3~5.4	
CFSCS-M4	M4	8	6.5	5.8~5.9	
CFSCS-M5	M5	10	8.0	7.1~7.2	
CFSCS-M6	M6	14	10.0	8.6~8.8	
CFSCS-M8	M8	15	12.0	10.6~10.8	
CFSCS-M10	M10	18	14.0	12.6~12.8	
CFSCS-M12	M12	22	16.0	14.6~14.8	

### CFHSCT

Dimensions : ISO metric /mm

Part Code	Thread Size	L	D Max	D1	T	Rec. Hole Size Thermoplastics -0.00/+0.10	Min. Wall Thickness
CFHSCT-M3	M3	6	5.0	6.5	0.58	4.6-4.8	Evaluate by Preproduction Test
CFHSCT-M3.5	M3.5	8	6.0	8.5	0.73	5.5-5.7	
CFHSCT-M4	M4	8	6.5	8.5	0.89	6.0-6.2	
CFHSCT-M5	M5	10	8.0	9.5	1.06	7.3-7.6	
CFHSCT-M6	M6	14	10.0	12.0	1.32	9.0-9.4	
CFHSCT-M8	M8	15	12.0	14.0	1.32	11.0-11.4	
CFHSCT-M10	M10	18	14.0	16.0	1.57	13.0-13.4	
CFHSCT-M12	M12	22	16.0	18.0	1.57	15.0-15.4	