
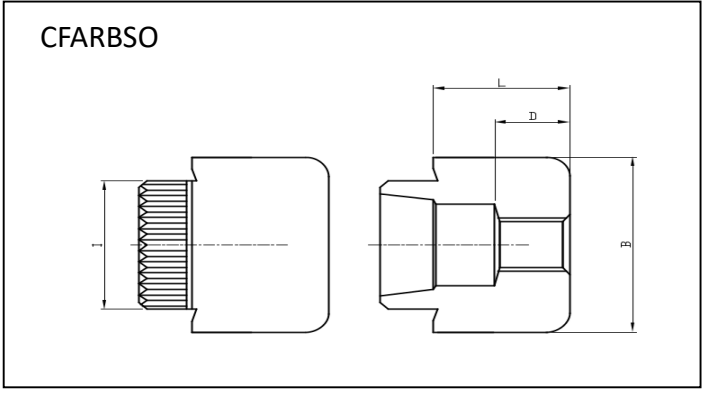


# CLINCHING FASTENERS CO., LTD.

## ANCHOR RIVET BUSH

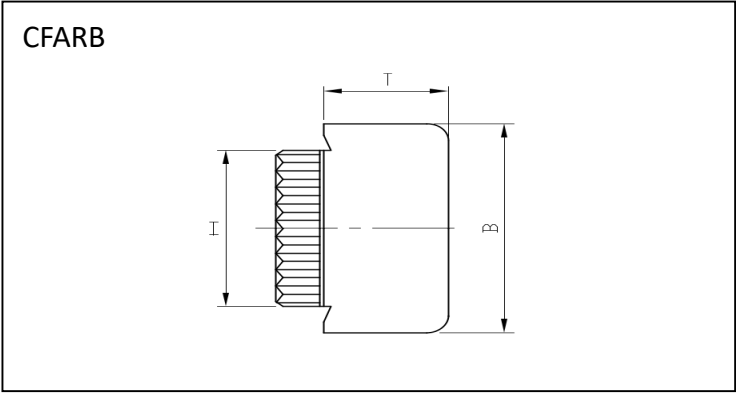

Material 材質：Steel 鋼 / Finish 表面: Cr3+ Zinc 三價鋅

CFARB / CFARBSO

Dimensions: ISO metric /mm

| Part Code<br>產品編號        | Thread Size<br>螺紋尺寸 | I    | B    | T    | D<br>(CFARBSO) | Hole Size<br>-0.00+0.10<br>板孔徑 |
|--------------------------|---------------------|------|------|------|----------------|--------------------------------|
| CFARB-M25<br>CFARBSO-M25 | M2.5x0.45           | 5.8  | 7.9  | 3.2  | 3.3            | 5.90                           |
| CFARB-M3<br>CFARBSO-M3   | M3x0.5              | 5.8  | 7.9  | 3.2  | 3.3            | 5.90                           |
| CFARB-M4<br>CFARBSO-M4   | M4x0.7              | 6.9  | 9.5  | 3.8  | 3.9            | 6.95                           |
| CFARB-M5<br>CFARBSO-M5   | M5x0.8              | 8.3  | 11.1 | 4.4  | 4.6            | 8.35                           |
| CFARB-M6<br>CFARBSO-M6   | M6x1.0              | 9.5  | 12.7 | 5.7  | 5.9            | 9.65                           |
| CFARB-M8<br>CFARBSO-M8   | M8x1.25             | 13.0 | 15.9 | 6.4  | 6.5            | 13.10                          |
| CFARB-M10<br>CFARBSO-M10 | M10x1.5             | 15.4 | 19.1 | 7.6  | 7.9            | 15.50                          |
| CFARB-M12<br>CFARBSO-M12 | M12x1.75            | 19.4 | 25.4 | 10.2 | 10.4           | 19.50                          |

|                 |         |         |         |         |         |         |         |         |         |    |    |    |
|-----------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|----|----|----|
| Shake Code      | 01      | 03      | 04      | 06      | 08      | 10      | 12      | 13      | 14      |    |    |    |
| Sheet Thickness | 0.5~0.6 | 0.7~0.8 | 0.9~1.0 | 1.1~1.3 | 1.4~1.6 | 1.7~1.9 | 2.0~2.2 | 2.3~2.5 | 2.6~2.8 |    |    |    |
| Shake Code      | 16      | 17      | 18      | 19      | 20      | 22      | 23      | 24      | 26      |    |    |    |
| Sheet Thickness | 2.9~3.1 | 10swg   | 3.2~3.4 | 3.5~3.7 | 3.8~4.0 | 4.1~4.3 | 4.4~4.6 | 4.7~4.9 | 5.0~6.0 |    |    |    |
| Lengths         | 3       | 4       | 5       | 6       | 8       | 10      | 12      | 14      | 16      | 18 | 20 | 25 |

Remark: for stainless steel type possible on request